

GA60/GA70 Removable Security Post Instructions


Please Note: The GA70 Hitch Lock Post is intended for use with the Bulldog Minilock.

WARNING:


1. For maximum security you are advised to site the post on a concrete or tarmacadam site - 'NOT ON LOOSE GROUND'.

Fitting

1. Mark the position on the ground for the socket.
2. Excavate a hole approximately 300mm wide x 300mm deep.
3. Mix the concrete taking care to make sure the mix is not too wet as a fairly firm mix is essential. When carrying out the following steps, care must be taken to ensure no concrete comes into contact with the lock.
4. Partly fill the hole with the concrete to a level approximately 200mm below ground level. Place the socket on the concrete, the correct level has been reached when the bottom of the lock housing is 20mm above ground level.
5. With the socket in place, continue to fill the hole tamping the concrete around the socket until half way up.
6. Insert the post into the socket and check with a spirit level that the post is upright, continue to fill around the socket with the concrete until ground level is reached.
7. Check that the post is still upright. Remove the post and allow the concrete to set for 48 hours prior to use.

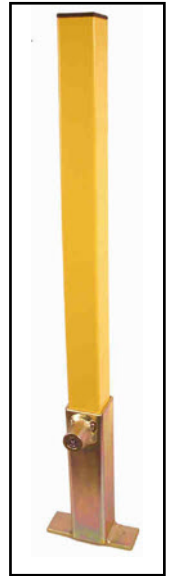

GA60

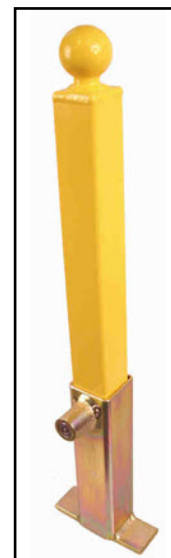

GA70

We have taken every care in the design and manufacture of this security device and we believe that it is an effective deterrent. However we cannot guarantee that it will resist the efforts of the most determined thief, and as such we do not accept any liability for loss or damage caused by theft, vandalism or other illegal activity against property to which this device is fitted.



Lock Lubrication.

IMPORTANT - To ensure free movement of the lock, spray lock mechanism & ball bearings with WD40 (or equivalent) minimum every four months.

Key Security. Enter your key number here:

IMPORTANT - Your Bulldog product is supplied with two keys. Make a note of your personal key number in the space provided above and **keep it in a safe place**. Should you lose your keys, replacements can only be obtained from the manufacturer through your dealer.

This product is guaranteed for 12 months from the date of purchase. In the unlikely event of a manufacturing fault arising with the product, Bulldog will replace or repair the product free of charge. This guarantee is only valid if the product has been used as directed and a valid proof of purchase is provided. This does not affect your statutory rights.